

AUTO SLIDING DOOR

Safety, Easy Access, Energy Efficient and Cost-saving







TECHNICAL SPECS

Leaf weight	1 x 180kg single leaf / 2 x 140kg double leaf
Opening speed	max. 0.8 m/s
Closing speed	max. 0.8 m/s
Opening force	10 to 150 N (adjustable)
Closing force	10 to 150 N (adjustable)
Hold open time	1 to 5 sec
Mechanical	
Installation	Surface Applied/Between walls/ Against Posts
Structure	Aluminium
Casing	With cover 170H x 110W
	Without cover 150H x 110W
Clear opening	700 – 3000 mm single leaf
	900 – 3000 mm double leaf
Clearance height	max. 3100 mm
Electrical	90130094 from 04120 period 550
Power supply	AC 220V 5A 50Hz / AC 110V 60Hz
External power supply	24 V DC / 2A
Power Consumption	80W
Sensor power	DC24V
Temperature range	-10 to +50 C
Relative humidity	5 to 95%
Function Programs	
Off	
Automatic	-
Permanent Open	
Half Open/Partial Openin	9
Locked	

AUTO SLIDING GATE Security / Safety







Capacity: 500 to 8000 KG Speed: 9 M Per / Min Make: European Direction: Bi - Direction Limit Switch: Mechanical

Controller : Inbuilt















AUTO SWING GATES Security / Safety







Capacity: 200 to 700 KG
Size: 4 M x 4 M
Speed: Adjustable
Make: European
Direction: Single

Limit Switch : Mechanical Controller : Seprate













BOOM BARRIERS



WITH LONG RANGE READER



WITH SKIRTING






ROLLING SHUTTERS





MOTORISED / HAND CRANK





MOTORS




SLATS



TIPOD / FLAP BERRIERS

They allow only authorized personnel entrance into facilities and act as a tough-to-breach barrier to would-be unauthorized entrants. By simply employing an entrance turnstile at your facility you can elevate your security and deter unwanted entrants almost entirely autonomously.

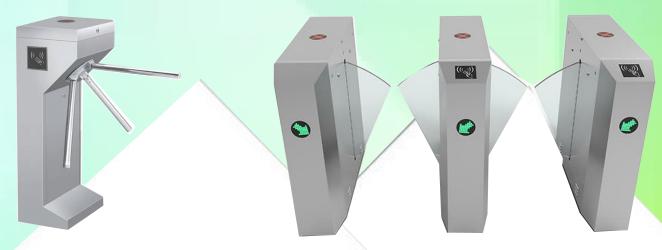

SM SECUTECH SOLUTIONS LLP



E-165, Solaris - 1 Opp. Sano fiand L&T Gate No -6, Saki Vihar Road, Andheri East Mumbai - 400072 Maharastra, (India).



7045757043 / 7045757053 sales@smsecutech.com www.smsecutech.com